

# ROUGH COUNTRY

SUSPENSION SYSTEMS®



## 110504BAG

## JEEP XJ REAR BUMPER

### Thank you for choosing Rough Country

Please read instructions before beginning installation. Check the kit hardware against the parts list and product layout. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

If questions exist we will be happy to answer any questions concerning the design, function, and correct use of this product.

The installer must verify that the mounting kit does not interfere with the factory air bag sensors, which must not be relocated or modified in any way. The vehicles air bag system may not operate properly if the winch mounting kit is not mounted in compliance with the vehicle manufacturers recommendations.

Winch mounting should only be performed on vehicles with standard OEM bumpers.

### Kit Contents:

- 1- Rear Bumper
- 2- D-Rings
- 1-Pair 2" LED Flush Mount Lights
- 1- 110504Bag1 including:
  - 8-10mmx25mm Bolts
  - 8-10mm Flat Washers
  - 16-1/2" x 1.5" Bolts
  - 22-1/2" Flat Washers
  - 8-1/2" Nylock Nuts



### Tools Needed:

- 4mm Allen
- 10mm Wrench
- 15mm Socket
- 17mm Socket
- 19mm Socket
- 3/4" Socket
- Various Drills
- Drill Motor
- Ratchet
- Torque Wrench

## INSTALLATION

1. Place vehicle on a flat surface and set emergency brake.
2. Using a 19mm socket, remove the 8 bolts holding the hitch and gas tank skid. **See Photo 1.**
3. Remove the hitch and gas tank skid from the Jeep.
4. (Bumper has been removed to show bolt location) Using a 15mm socket, remove the bumper & brackets as 1 unit. **See Photo 2.**

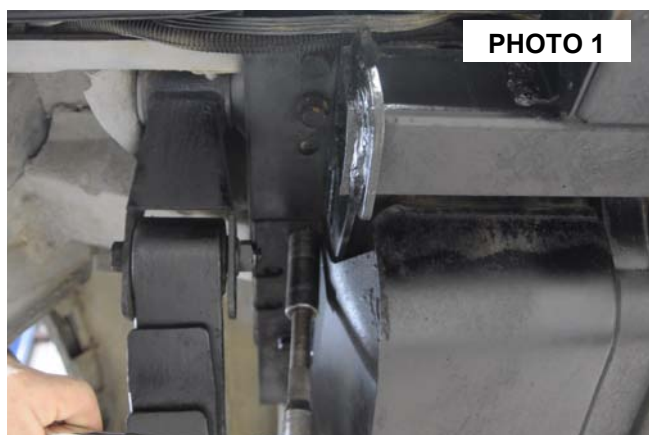


PHOTO 1

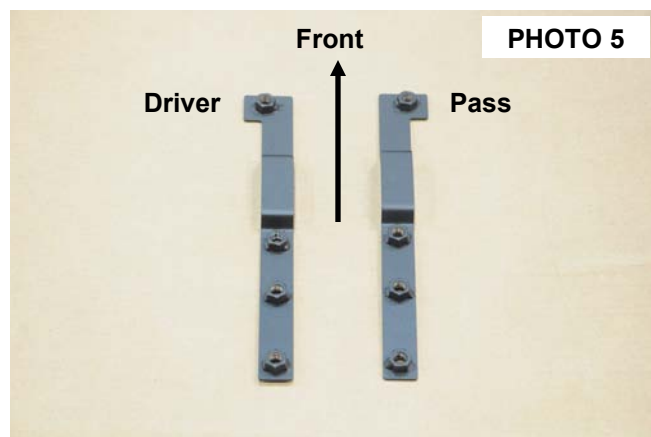


PHOTO 2

5. If the flag nuts are riveted in the frame, drill the rivets and remove the flag nuts from the frame rails. See **Photo 3 & 4.**





6. Locate the supplied flag nuts, the way that the front part faces determines the side of the Jeep these are to be installed in. See **Photo 5.**
7. Install the flag nut in the frame rail. See **Photo 6.**





8. Drill the gas tank skid using a 17/32" drill. See **Photo 7.**
9. Loosely install the frame brackets and exhaust hanger under the frame rails using the supplied 1/2" x 1.5" bolts and washers. See **Photo 8.**



10. Mark and cut the body so the frame bracket will sit flush against the body. Paint cut area to prevent rust. **See Photos 9 & 10.**

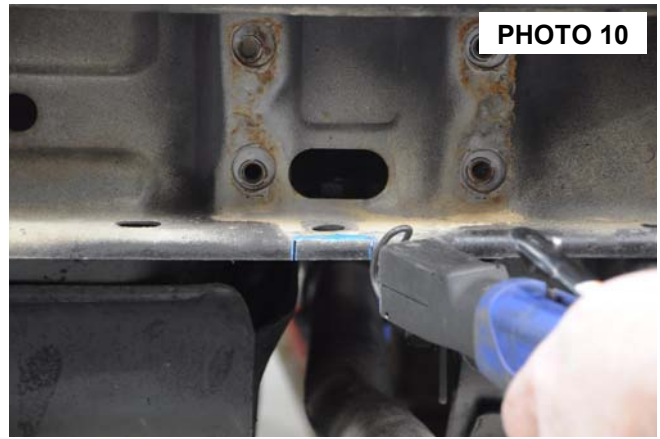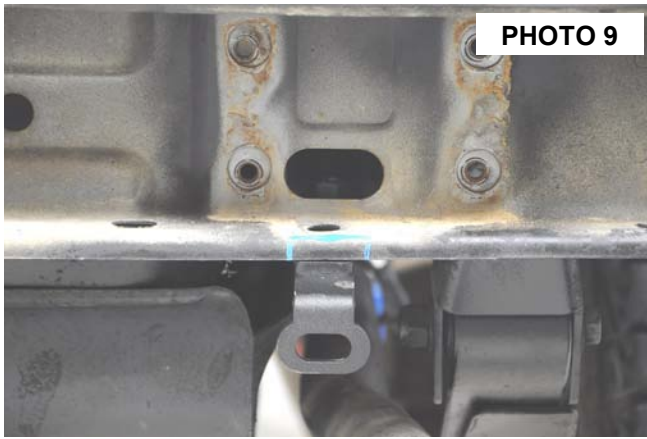


11. Tighten the frame bracket bolts using a 3/4" socket. Torque to 90ft-lbs. **See Photo 11.**  
12. **Photo 12** shows the factory exhaust hanger installed.

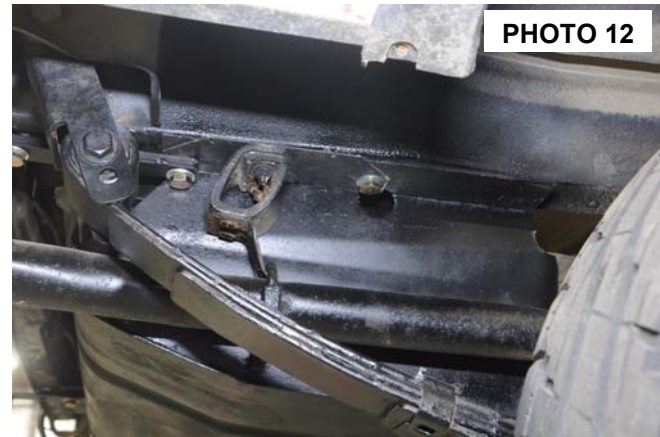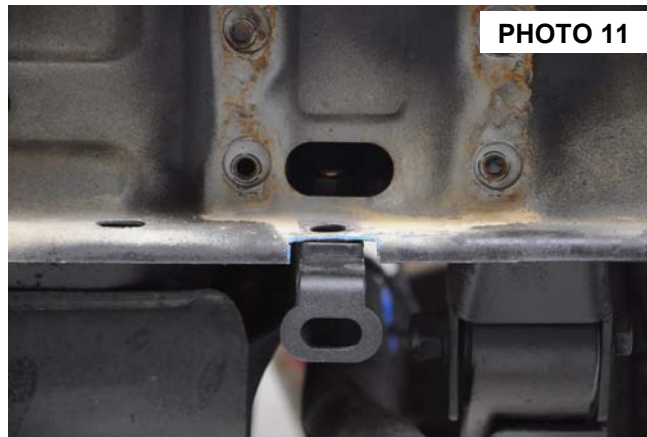


13. The rear frame bracket hole will use a 1/2" x 1.5" bolt, flat washer and nylock nut. Torque to 90ft-lbs using a 3/4" socket and wrench.  
14. Install the supplied bumper brackets, using the supplied 10mm x 25mm bolts and washers. Do not tighten at this time. **See Photo 13.**



15. Install the rear bumper using the 6 supplied 1/2" x 1.5" bolts, washers and lock nuts. **See Photo 14.**
16. Adjust the bumper to the desired position and tighten the bumper mounting bolts using a 17mm socket. Torque to 45ft-lbs.
17. Using a 3/4" socket and wrench, tighten all of the bumper mounting bolts. Torque to 65ft-lbs. **See Photos 15 & 16.**

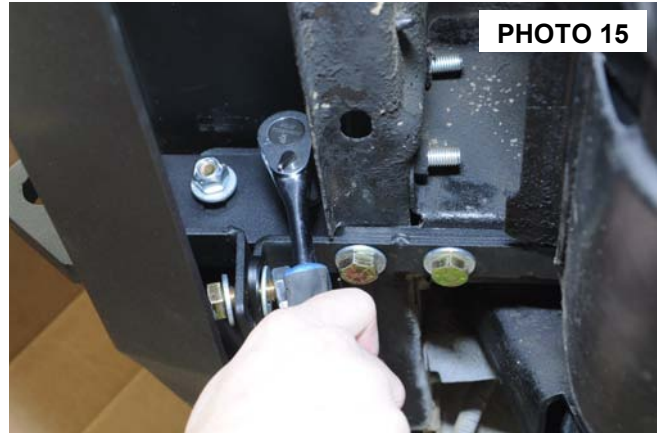

18. Install the supplied flush mount lights using the supplied hardware. **See Photo 17.**

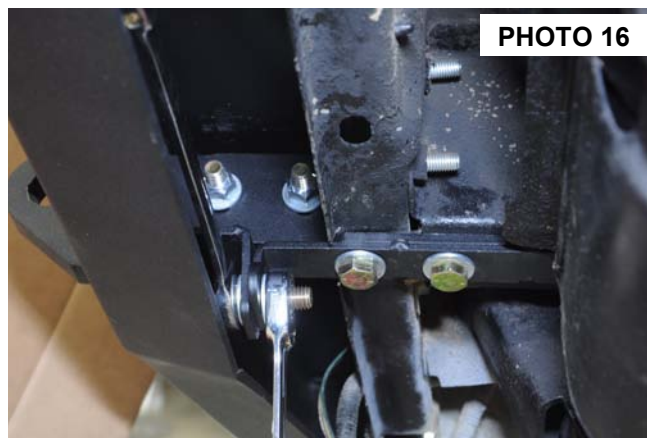

19. Tighten the light hardware using a 4mm Allen and a 10mm wrench.
20. Wire the lights using the instructions included with the light.

### POST INSTALLATION INSTRUCTIONS

1. Check and retighten hardware at 50 miles and again at 500 miles. Periodically check all hardware for tightness.



By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable , State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

